



||JAI SRI GURUDEV||
Sri Adichunchanagiri Shikshana Trust (R)
SJB INSTITUTE OF TECHNOLOGY
BGS Health & Education City, Bengaluru - 560060



Department of Information Science and Engineering



Presentation
on
“NLTK”

Presented By: Chetan R, Assistant Professor
Class: 7th A and B
Date:11-11-2021

List methods

- Getting information about a list
 - `list.index(item)`
 - `list.count(item)`
- These **modify the list in-place**, unlike str operations
 - `list.append(item)`
 - `list.insert(index, item)`
 - `list.remove(item)`
 - `list.extend(list2)`
 - same as `list += list2`
 - `list.sort()`
 - `list.reverse()`

Programming tasks?

- So far, we've studied programming syntax and techniques
- What about tasks for programming?
 - Homework
 - Mathematics, statistics (Sage)
 - Biology (Biopython)
 - Animation (Blender)
 - Website development (Django)
 - Game development (PyGame)
 - **Natural language processing (NLTK)**

Natural Language Processing (NLP)

- How can we make a computer understand language?
 - Can a human write/talk to the computer?
 - Or can the computer guess/predict the input?
 - Can the computer talk back?
 - Based on language rules, patterns, or statistics
 - For now, statistics are more accurate and popular

Some areas of NLP

- shallow processing – the surface level
 - **tokenization**
 - **part-of-speech tagging**
 - forms of words
- deep processing – the underlying structures of language
 - **word order (syntax)**
 - meaning
 - translation
- **natural language generation**

The NLTK

- A collection of:
 - Python functions and objects for accomplishing NLP tasks
 - sample texts (corpora)
- Available at: <http://nltk.sourceforge.net>
 - Requires Python 2.4 or higher
 - Click 'Download' and follow instructions for your OS

Tokenization

- Say we want to know the words in Marty's vocabulary
 - *"You know what I hate? Anybody who drives an S.U.V. I'd really like to find Mr. It-Costs-Me-100-Dollars-To-Gas-Up and kick him square in the teeth. Booyah. Be like, I'm Marty Stepp, the best ever. Booyah!"*
- *How do we split his speech into tokens?*

Tokenization (cont.)

- How do we split his speech into tokens?

```
>>> martySpeech.split()
['You', 'know', 'what', 'I', 'hate?', 'Anybody',
'who', 'drives', 'an', 'S.U.V.', "I'd", 'really',
'like', 'to', 'find', 'Mr.', 'It-Costs-Me-100-
Dollars-To-Gas-Up', 'and', 'kick', 'him',
'square', 'in', 'the', 'teeth.', 'Booyah.', 'Be',
'like,', "I'm", 'Marty', 'Stepp,', 'the', 'best',
'ever.', 'Booyah!']
```

- Now, how often does he use the word "booyah"?


```
>>> martySpeech.split().count("booyah")
0
>>> # What the!
```


Tokenization (cont.)

- We could lowercase the speech
- We could write our own method to split on "." split on ",", split on "-", etc.
- The NLTK already has several tokenizer options
- Try:
 - `nltk.tokenize.WordPunctTokenizer`
 - tokenizes on all punctuation
 - `nltk.tokenize.PunktWordTokenizer`
 - **trained** algorithm to statistically split on words

Part-of-speech (POS) tagging

- If you know a token's POS you know:
 - is it the subject?
 - is it the verb?
 - is it introducing a grammatical structure?
 - is it a proper name?

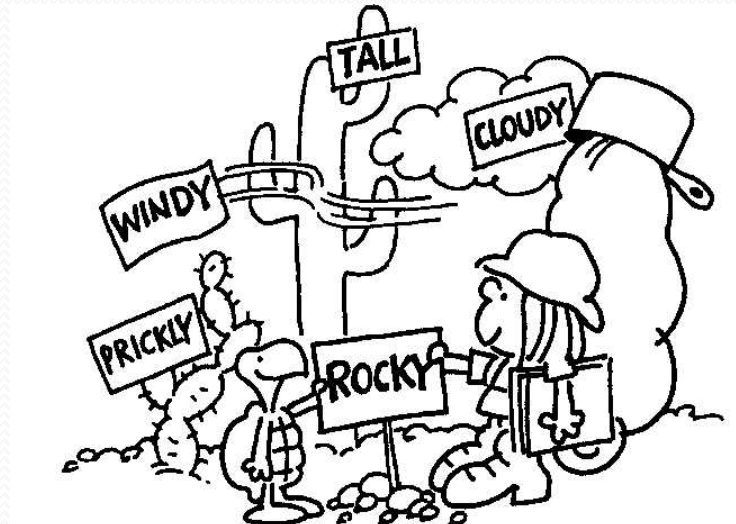

Part-of-speech (POS) tagging

- Exercise: most frequent proper noun in the Penn Treebank?
 - Try:
 - `nlk.corpus.treebank`
 - Python's `dir()` to list attributes of an object

```
>>> dir("hello world!")  
[..., 'capitalize', 'center', 'count',  
'decode', 'encode', 'endswith', 'expandtabs',  
'find', 'index', 'isalnum', 'isalpha',  
'isdigit', 'islower', 'isspace', 'istitle',  
'isupper', 'join', 'ljust', 'lower', ...]
```

Tuples

- `tagged_words()` gives us a list of **tuples**
 - **tuple**: the same thing as a list, but you can't change it
 - in this case, the tuples are a (word, tag) pairs

```
>>> # Get the (word, tag) pair at list index 0
...
>>> pair = nltk.corpus.treebank.tagged_words()[0]
>>> pair
('Pierre', 'NNP')
>>> word = pair[0]
>>> tag = pair[1]
>>> print word, tag
Pierre NNP
>>> word, tag = pair           # or unpack in 1 line!
>>> print word, tag
Pierre NNP
```

POS tagging (cont.)

- How do we tag plain sentences?
 - A NLTK tagger needs a list of tagged sentences to train on
 - We'll use `nltk.corpus.treebank.tagged_sents()`
 - Then it is ready to tag any input! (but how well?)
 - Try these tagger objects:
 - `nltk.UnigramTagger(tagged_sentences)`
 - `nltk.TrigramTagger(tagged_sentences)`
 - Call the tagger's `tag(tokens)` method

```
>>> tagger = nltk.UnigramTagger(tagged_sentences)
>>> result = tagger.tag(tokens)
>>> result
[('You', 'PRP'), ('know', 'VB'), ('what', 'WP'),
 ('I', 'PRP'), ('hate', None), ('?', '.'), ...]
```

POS tagging (cont.)

- Exercise: Mad Libs
 - I have a passage I want filled with the right parts of speech
 - Let's use random picks from our own data!
 - This code will print it out:


```
print properNoun1, "has always been a", adjective1, \  
    singularNoun, "unlike the", adjective2, \  
    properNoun2, "who I", pastVerb, "as he was", \  
    ingVerb, "yesterday."
```

Eliza (NLG)

- Eliza simulates a Rogerian psychotherapist
- With while loops and tokenization, you can make a chat bot!
 - Try:
 - `nltk.chat.eliza.eliza_chat()`

Parsing

- Syntax is as important for a compiler as it is for natural language
- Realizing the hidden structure of a sentence is useful for:
 - translation
 - meaning analysis
 - relationship analysis
 - a cool demo!
 - Try:
 - `nltk.draw.rdparsers.demo()`

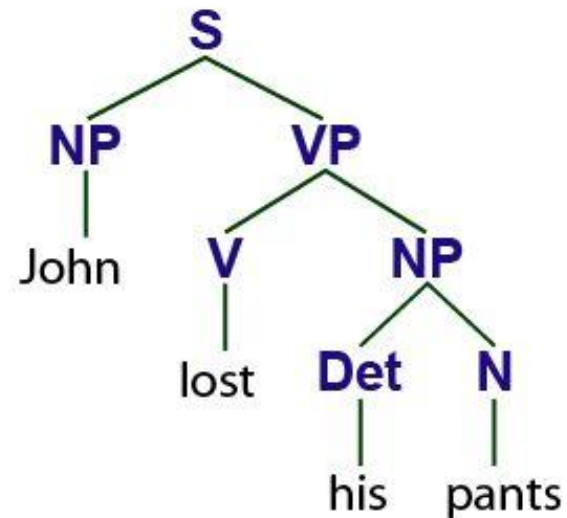

Conclusion

- NLTK: NLP made easy with Python
 - Functions and objects for:
 - tokenization, tagging, generation, parsing, ...
 - and much more!
 - Even armed with these tools, NLP has a lot of difficult problems!
- Also saw:
 - List methods
 - `dir()`
 - Tuples